

STROHFELD AGRICULTURAL IMPORTS

# Town Sunny Implements

---

## Tractor Implements Specifications Guide

10<sup>th</sup> February 2010

## Contents

Topper Mower (Slasher) .....	3
Rotary Cutter .....	3
Tipping Trailer.....	4
Transport Box .....	4
Post Hole Digger.....	4
Carry-all.....	5
3-Point Bale Spear .....	5
Grader Blade (light duty).....	5
Topper Mower.....	5
Pipe Ripper .....	6
Spreader.....	6

## Topper Mower (Slasher)

with PTO shaft

	TM140	TM160
Dimensions (L*W*H)	140*160*90cm	160*160*90cm
Structure Weight	190kg	230kg
Cutting Width	140cm	160cm
Cutting Height	1.5-4.5"	1.5-4.5"
PTO Speed	540rpm	540rpm
Power Required	25-40hp	30-65hp



## Rotary Cutter

with PTO shaft

	RCN180
Dimensions (L*W*H)	1850*1900*900mm
Cutting Width	1.5-10"
Cutting Height	180cm
Stump Jumper	24" Diameter
Wheel	15" Separate Rubber Wheel
PTO Speed	540rpm
PTO Shaft	6*6*1300mm
Machine Weight	340kg
Power Required	30-70hp






## Tipping Trailer

	TL1000
Internal Length	2000mm
Internal Width	1000mm
Internal Height	350mm
Estimated Payload	1000kg
Drawbar Type	A-Frame
Number of Axles	1
Wheel Position	Inside
Tire Size	165R or customer request

## Transport Box

	TTB150
Width	150cm
Weight	105kg
Capacity	0.51m <sup>3</sup>
Max HP	60hp
Hitch	cat.1

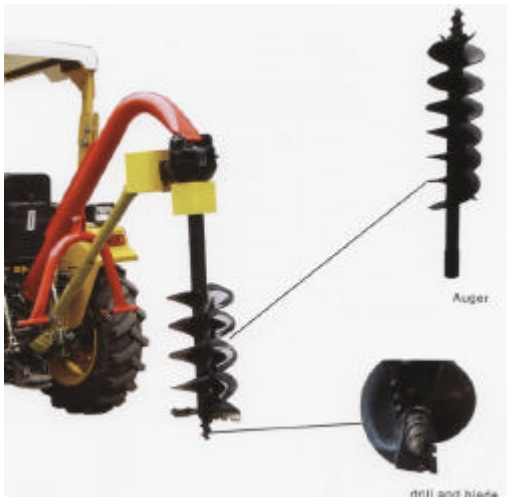

## Post Hole Digger

with PTO shaft

	HD-12	HD-14
Drill Diameter	12" (304mm)	14" (355mm)
Length of Auger	559mm	762mm
Power Match	20-40hp	30-45hp
PTO Speed	540rpm	540rpm
Gearbox Rate	3:1	3:1
Machine Weight	112kg	127Kkg

## Carry-all

	4CA	7CA
Specification	4'x3'	7'x3'9"
Weight	65kg	130kg



## 3-Point Bale Spear



	3BS
Centre Spear	2"x39 1/2" Vertically adjustable
Lower Spears	1 1/4"x13 1/4" .25" spacing centre to centre
Capacity	1000lb
Hitch pins	Category 1 or 2
Recommended tractor hp	above 25hp

## Grader Blade (light duty)

	6GB
Dimensions (l*w*h)	1820*1100*1050mm
Working width	1800mm
Structure weight	90kg
Tractor Horsepower	25-50hp



## Topper Mower

with PTO shaft

	TM270A
Dimensions (L*W*H)	290*195*120cm
Structure weight	450kg
Cutting Width	270cm
Cutting Height	2-7"
PTO Speed	540rpm
PTO Shaft	6*6*1300mm (with shear pin)
Tractor HP	55-90





## Pipe Ripper

	RP-I	RP-II
Dimensions (L*W*H)	110*55*65cm	120*87*95cm
Structure Weight	45kg	90kg
Max Diameter of Pipe	80mm	80mm
Power Required	18-50hp	18-50hp



## Spreader

	SM400
Dimensions (L*W*H)	1200*1050*1520mm
Capacity	400L
Structure weight	55kg
Max Loading	570kg
Working Width	6-20m
Way of dose setting	manually
PTO Speed	540rpm
Power Required	25-45hp

